

Best Owner Practices for Project Control

John K. Hollmann, PE CCE

ABSTRACT: For the past several decades, owner companies have been reorganizing, reengineering, downsizing, and, at times, eliminating their in-house cost engineering function in a drive to improve cost competitiveness by reducing what company management perceives as “overhead.” Capital program managers, hoping that these actions would improve cost outcomes, have largely been disappointed. In this article, a better approach than cutting and blind outsourcing is described; an approach that uses the best owner cost engineering practices to ensure competitive outcomes. The approach has been demonstrated to work through quantitative research of empirical industry data.

KEY WORDS: Benchmarking, best practices, and cost and schedule outcomes

For the past several decades, owner companies have been reorganizing, reengineering, downsizing, and, at times, eliminating their in-house cost engineering function in a drive to improve cost competitiveness by reducing what company management perceives as “overhead.” Capital program managers, hoping that these actions would improve cost outcomes, have largely been disappointed. In this article, a better approach than cutting and blind outsourcing is described; an approach that uses the best owner cost engineering practices to ensure competitive outcomes. The approach has been demonstrated to work through quantitative research of empirical industry data.

Independent Project Analysis (IPA) research, as reported in industry literature in 1994, had shown that average cost growth (the ratio of actual/estimated costs) for projects was declining. However, more recent research has shown that since 1994, neither average cost growth nor variability (the plus or minus range) has improved [4, 2]. Past improvements in average cost growth were largely driven by improved up-front project definition, prior to full authorization of project funds (i.e., front-end loading or FEL). However, good FEL can improve the cost outcome only so much before weaknesses in other practices become a constraint. Owner cost engineering/project control practices used during the FEL and execution phases of a project are one such constraint and an opportunity for improvement.

BENCHMARKING IDENTIFIES TRENDS AND BEST PRACTICES FOR COST ENGINEERING/PROJECT CONTROL

Project system benchmarking is used to identify industry trends and best practices, including those for cost engineering. The benchmarking process compares a company’s project system performance with that of its competitors. To support benchmarking, data about actual project practices (inputs) and results (outcomes) are collected. Using the empirical data in an industry database, we perform statistical analysis to identify those inputs that drive the best outcomes.

We use an empirical industry database to research cost engineering practices and determine which are best at improving cost and schedule outcomes. Many of our research findings about cost engineering are common sense, but it is too easy for management to reject common sense when other cost reduction options (often counter-productive) look so much more attractive on paper. The practices discussed in this article have been empirically demonstrated to work.

Before describing which practices are “best,” we need to explain the scope of the cost engineering practices studied by IPA and the “typical” practices used in industry. The practices studied include cost estimating, planning and scheduling, and cost/schedule control; these practices collectively are often referred to as project control, which is a core subset of the cost engineering field. Figure 1 illustrates the

primary steps in the project control process, as documented by AACE International’s **Total Cost Management Framework** [3].

Starting at the top-center of the process map in figure 1, the cost engineer estimates the project cost and establishes the cost budget for the project. The cost engineer uses the planning and scheduling step to translate the project’s scope into a logical sequence of work activities. The project activities are then executed while the cost engineer measures and assesses the project’s performance against the plan (i.e., cost/schedule control). On the left side of the process map, the cost engineer identifies corrective actions when deviations from the plans occur. Finally, the control cycle loop is closed when the cost engineer updates project plans to address project trends and changes.

Through benchmarking, we have identified typical industry project control practices, both good and bad. Typically, engineering and construction contractors perform most day-to-day project control functions during project execution. Owners generally set project control requirements, evaluate contractor estimates and proposals, review contractor progress reports, and negotiate contract changes. If the project scope is well defined at the time of project funds authorization (i.e., during FEL), then an engineering contractor prepares the cost estimate and critical-path schedule to support both authorization and control. However, in many projects, definition is lacking in some way and owners will prepare a conceptual or preliminary estimate and milestone schedule for funds authorization, and an engineering contractor then prepares a detailed estimate and schedule later on (often too late) that will serve as a basis for control.

For small projects (i.e., <\$5 million), all of the owner’s project control tasks are typically performed on a part-time basis by a project manager or lead engineer from the plant who has experience managing projects. As projects increase in size, an owner project control specialist, who is often based at a central office, may be assigned to the project. However, many owners have downsized their centralized functions; without some way of sharing resources (and without empirical evidence of their value), plants and smaller business units find it difficult to justify keeping project control specialists in-house.

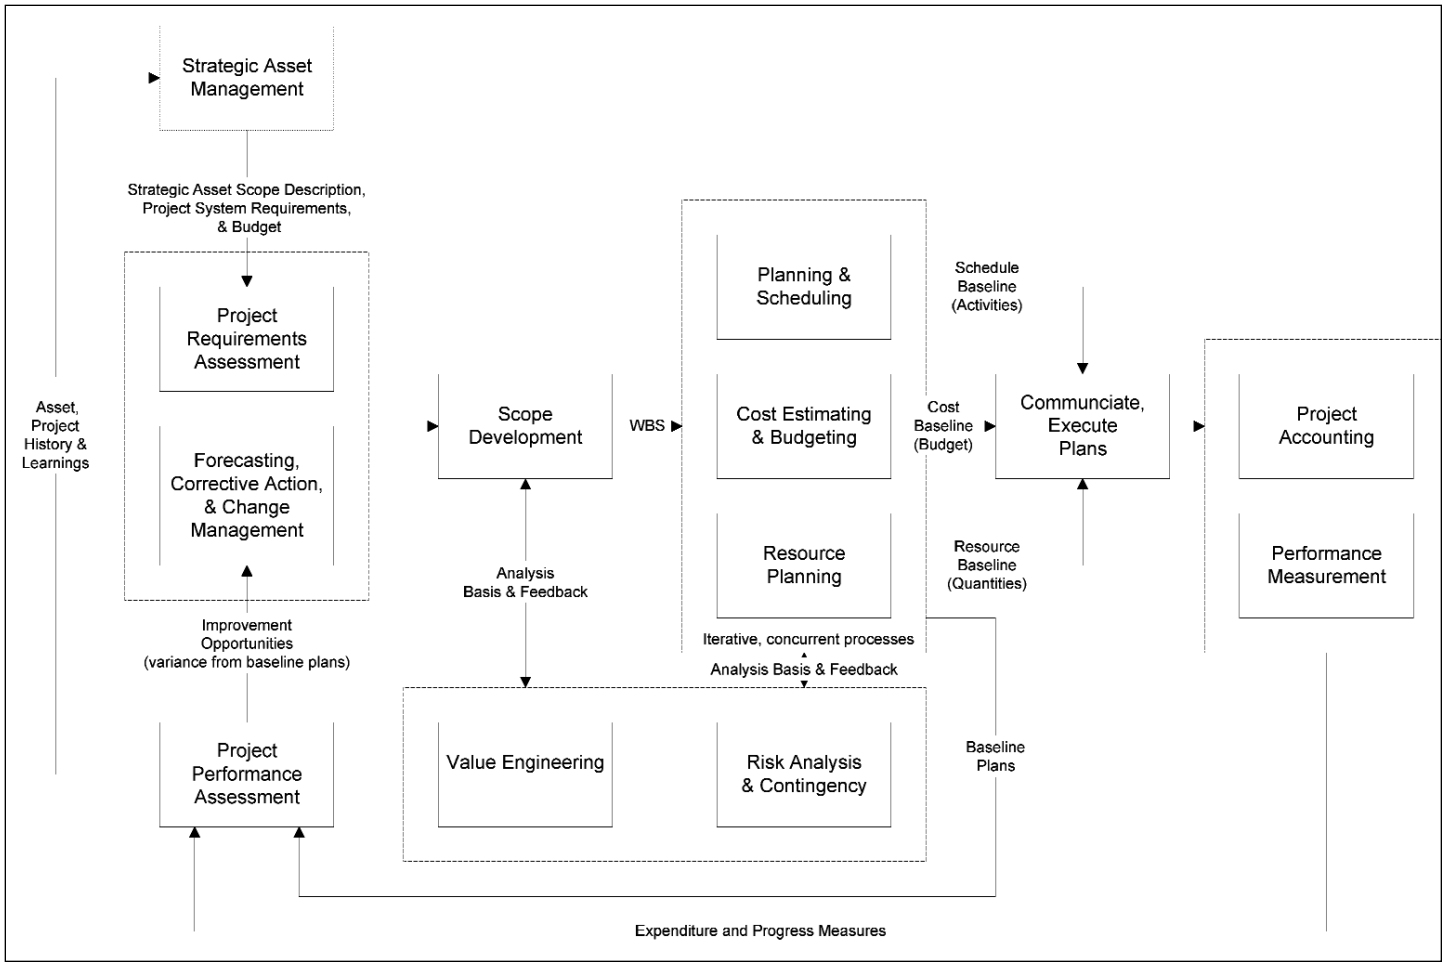


Figure 1—Project Control is a Process

As owners downsize their project control capabilities, there is a corresponding increase in the use of fixed-price contracting or alliances with contractors to reduce the owners' project control responsibilities (and presumably risk). As a result, owners typically have very limited estimating and project control experience and capability in-house. Basic owner responsibilities such as setting contractor requirements for project control are given minimal attention. This shrinkage in owner project control capability has not led to improved capital competitiveness; owners cannot divorce themselves from core project control responsibilities and practices and expect to get improved project outcomes. One of the most important findings of IPA's research is that the outcome of fixed-price projects is improved by good owner project control practices.

COST AND SCHEDULE ARE THE OBJECTIVES
(FEL DRIVES, PROJECT CONTROL STEERS)

Cost and schedule are key outcomes that generally determine whether a capital project meets its business objectives. Financial objectives are often expressed by measures such as internal rate of return (IRR). IRR and similar measures are based on the evaluation of the life cycle cost and revenue streams in a way that considers the time value of money. In simplistic terms, IRR can be represented by the following equation:

$$IRR = \frac{[(\text{present value of revenues}) - (\text{present value of costs})]}{(\text{value of capital investment})} \quad (\text{equation 1})$$

Project cost is a critical driver of IRR; it comprises most of the denominator in the IRR equation. The project schedule affects the IRR equation by determining when the revenue stream begins: the longer the schedule, the more heavily discounted the revenue, and the greater the chance that the market window of opportunity will close. Figure 1 illustrates how changes in project cost and schedule

affect the IRR of a typical commodity project in the CPI.

As shown in figure 2, for each 10 percent increase in capital project cost, there is about a two percent decrease in IRR. Controlling capital cost is therefore vital to achieving competitive rates of return. Schedule control is more critical for specialty markets that are sensitive to market windows and higher margins for those who get to market fastest. For commodities, it is not a good practice to try to time price swings or cycles.

As we stated earlier, FEL is the key driver of improved project cost. FEL is the

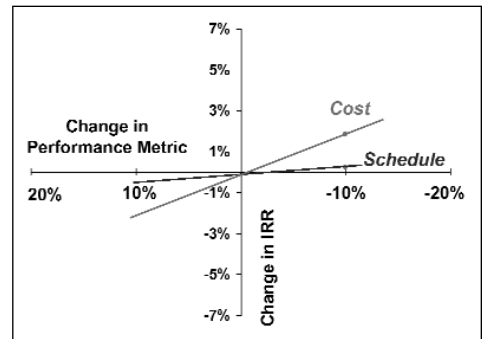


Figure 2—Cost Drives IRR for Commodity Projects

BEST PRACTICES FOR COST ENGINEERING/PROJECT CONTROL

Our research has identified a set of owner project control practices that correlate with improved cost outcomes. In

process by which projects are selected, defined, and prepared for execution (detailed design and construction). FEL is important because all other excellent practices require good FEL to be practicable and effective. To rate the quality of FEL, we use a numeric scale to evaluate the completeness and quality of front-end work in alignment and clarity in business objectives, site definition, project execution planning, and engineering definition. To make the numeric scale more intuitive, we group the scale into five categories ranging from “best” to “screening.” Figure 3 illustrates the FEL categories and shows how FEL drives project cost outcomes. Figure 4 illustrates that the average quality of project definition has improved—from the low end of the fair category to the good category—since 1990.

Although FEL is a powerful driver of cost outcomes, benchmarking has shown that not all outcomes have been improving with FEL. One disappointment has been the lack of improvement in the reliability of cost estimates. Figure 5 shows that estimate reliability has remained the same since 1994, with a standard deviation of plus or minus 12 percent (i.e., approximately 66 percent of project authorization estimates have reliability or accuracy within that range).

Industry estimates typically quote an accuracy range that covers closer to two standard deviations (i.e., about 95 percent of observations). Using that criterion, the IPA statistics indicate that industry authorization estimates are accurate only to about plus or minus 20 percent—not the five or 10 percent range that many consider typical.

Variability in actual versus estimated cost is a cause of concern because overestimates may lead to excess capital being committed to a project (our data show that excess capital tends to be spent), underestimates may lead to the wrong project being selected because of overstated IRR, or underestimates may contribute to poor cost control because they result in unrealistic plans, such that the project is not sure what its true status is.

The failure of project systems to produce more reliable estimates is largely caused by a lack of improvement in industry project control practices (i.e., a lack of improvement of estimate quality during FEL, a lack of improvement in

discipline and control during execution, or both). Status quo project control practices are not working well.

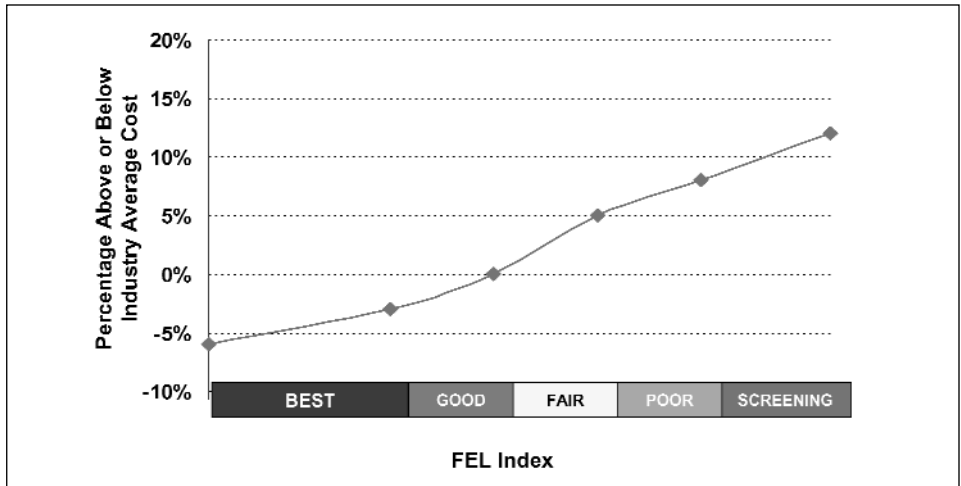


Figure 3—FEL Drives Down Project Cost

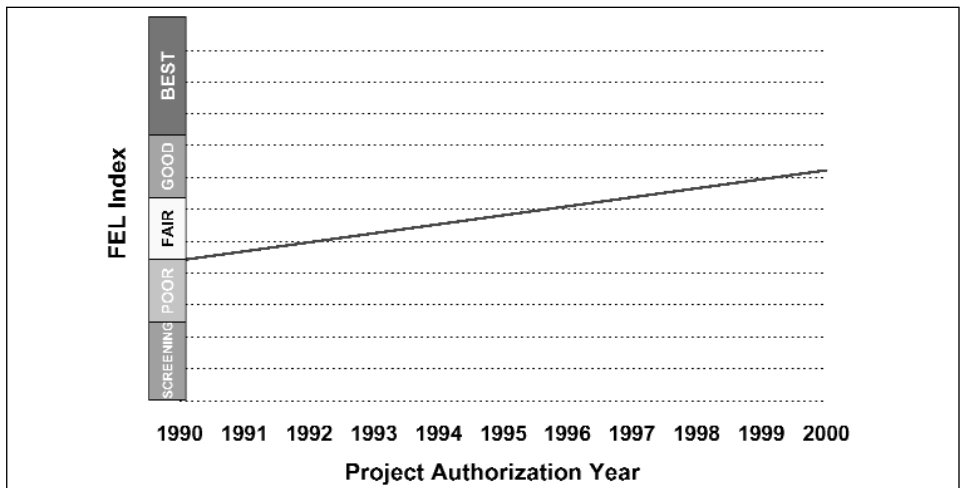


Figure 4—FEL Has Been Improving

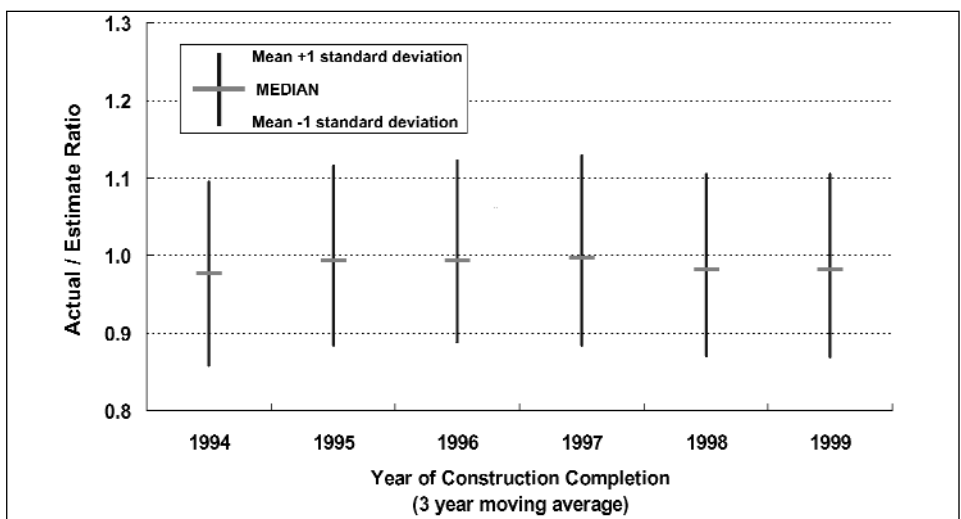


Figure 5—Estimate Reliability (Accuracy) Has Been Stagnant

this section we describe these practices and explain the degree to which they can improve your project results. The list does not represent a complete project control process or system by any means. For example, we assume that every project team will plan and control cost and schedule using a process similar to figure 1. The practices described below are those practices that reflect real owner commitment to project control.

Have an In-House Cost Estimator

Have an in-house cost estimator (or person with equivalent skills and knowledge) quantitatively validate the project cost estimate prior to authorization.

IPA has found that whether the owner or contractor prepares the authorization estimate does not matter as long as the estimate is validated quantitatively by an owner cost specialist. While project managers can sometimes be good cost estimators, most become overextended trying to do all project control tasks themselves. The most common means of quantitative validation include a comparison with actual absolute cost of past projects, comparison with absolute cost of check estimates (e.g., the owner estimate), or comparison with relative cost metrics or ratios [1].

The purpose of quantitative validation is not to repeat history, but to identify exceptions from the norm. You must be able to explain the exceptions. If the estimate is more aggressive (i.e., better productivity or lower cost) than past projects, specific project practices that will support the improved outcomes must be either in place or planned—wishful thinking is not enough.

Ensure that the Estimators are Independent of the Project

Independent means free of undue bias. The estimator can work for the owner or the engineering contractor, but the estimator's personnel performance evaluation must not be too heavily influenced by the project or business manager responsible for the project or asset. Managers can be biased toward their favorite projects, or they can have a predetermined cost in mind. Project costs are often underestimated because the estimator was subject to subtle (or not so subtle) coercion. Other projects are

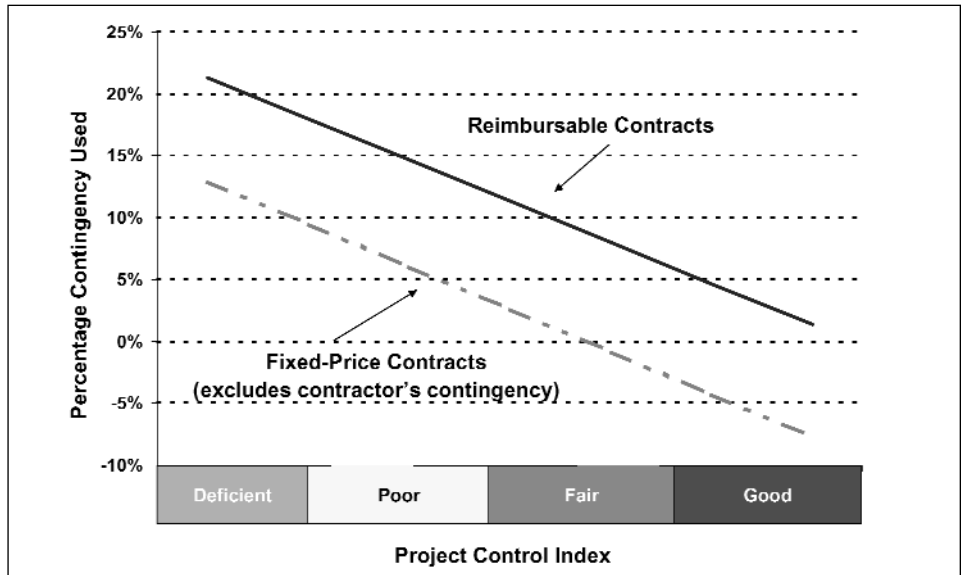


Figure 6—Less Contingency is Used With Good Project Control

overestimated because project team members are punished for even minor cost overruns.

Use Physical Progressing to Measure Work Progress for all Cost Categories

Unfortunately, too many project estimates are prepared with the primary or sole objective of obtaining “the number” for authorization with little regard for the estimates’ purpose and structure to support that purpose. The best practice is to develop the authorization estimate as the basis for project control for all cost categories; the bottom-line number is a byproduct. Even for fixed-price projects, an owner estimate designed for control will be the best basis for evaluating contractor proposals.

The estimate structure needs to be able to support physical progressing. During engineering and construction, many project managers rely on subjective measures of progress and then fall prey to over-optimism. Even worse are project managers who use the percentage of budget hours or dollars consumed as an indication of progress. One all too common scenario of poor progressing is the project manager who thinks the project is 95 percent complete and discovers while developing the punchlist that only 75 percent of the work has been completed. The project manager’s immediate reaction is to pile more people on the job to accelerate the progress, but the crowding then causes a complete breakdown of discipline and control. Another scenario is the project manager who ramps up

construction crews too early; the crews hang around waiting for drawings or materials that have been promised but not delivered.

Assign an Owner Project Control Specialist to the Project During Execution

Project managers have plenty to handle in leading the project without performing all the tasks of project control. Even if the heroic project manager can handle it all, the project is at risk of disruption (particularly schedule slip) if the project manager is pulled off or otherwise leaves the project (heros are in great demand). The project control specialist does not need to be assigned full time; in fact, it is common for one project control specialist to handle multiple small projects (just as the project manager might). Owners who have project control specialists to assign tend to have a project control process and an overall stronger project system.

Report Project Status and Progress Frequently and in Detail

This practice is likely a proxy measure for project control process discipline. To produce frequent, detailed reports, all pieces of effective control will likely be in place: strong FEL and project planning, a well-structured definitive estimate, physical progressing for all cost categories, and an assigned project control specialist. A contractor can prepare the report, but the owner must at least establish the reporting requirements and then evaluate and react appropriately to the report contents.

Collect Actual Cost Information and Use it to Plan and Validate the Estimate

The historical cost database is where the owner closes the loop on the project control process [1]. To quantitatively validate an estimate, the cost specialist must have something against which the estimate can be compared. A historical database provides absolute comparison project data (estimated and actual), cost metrics, and ratios. External benchmarks should be obtained as well. Another benefit of developing an historical database is that the practice of asking for detailed cost proposals and detailed final closeout data shows the contractor that the owner understands project costs and is not likely to be fooled. In fact, our research shows that owners who quantitatively validates estimates and collects detailed cost data does obtain better fixed-price proposals.

PUTTING THE PRACTICES TOGETHER

IPA has developed a numeric scale with which to rate project control practices on a project. To make the numeric scale more intuitive, we group the scale into four categories ranging from “good” to “deficient.” Figure 6 shows how cost growth can be reduced by 20 percent using the best project control practices (the figure shows the percentage of contingency used on a \$5 to 10 million project with good FEL; the percentage reduction is greater for smaller projects). Strong project control practices reduce contingency use for both reimbursable and fixed-price contracts. *Fixed-price* is a misnomer because the price is fixed only if there are no changes; strong FEL and project control both reduce the amount of change.

STRATEGY FOR SUCCESS DURING EXECUTION: PLAN AGGRESSIVELY, THEN CONTROL

Will best FEL, backed by good project control practices, result in the most competitive project cost outcomes? Not necessarily. Project managers who start with conservative (i.e., fat) plans at authorization and then control against that conservative base will succeed only in achieving the noncompetitive outcome that they planned for. Figure 7 shows how project control reduces contingency usage

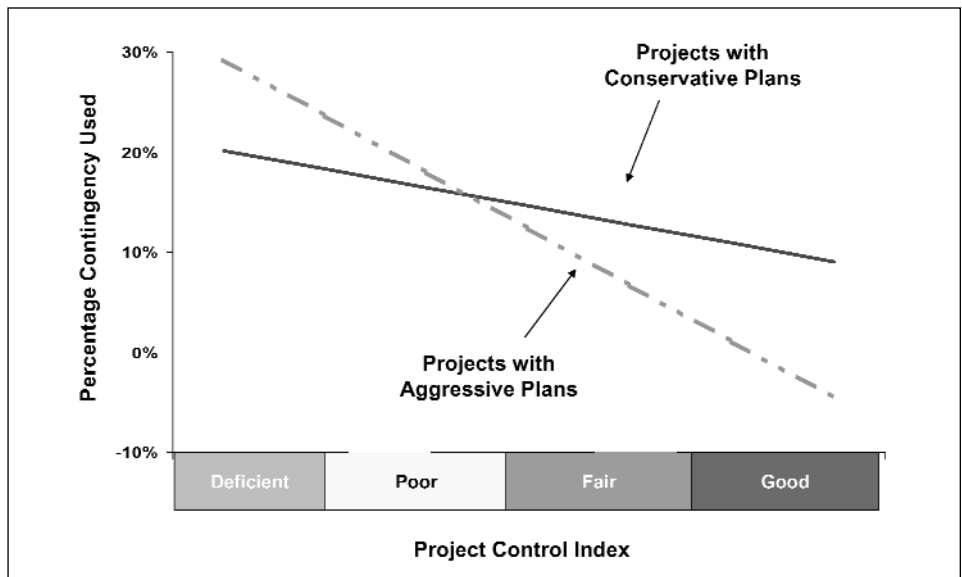


Figure 7—Aggressive Projects With Strong Project Control Achieve the Best Results

for aggressively scheduled projects to 0 percent, but project control does little to reduce contingency usage for conservatively scheduled projects because conservatively planned projects have little trouble avoiding “growth;” these projects tend to be loaded with “fat” to cover ineffective practices. In other words, project control cannot make an ineffective project effective. It can only preserve the value that is built into a plan during FEL.

In summary, let’s review the practices that successful owner project systems use to be competitive. To ensure project success, the project team defines the project well during the FEL phase of the project. The plans that the team develops during FEL are aggressive (they know that the estimate is aggressive because the owner’s cost experts have quantitatively validated it) and the estimator structures the cost estimate at authorization to support physical progressing of all cost categories. During the execution phase of the project, the team measures their progress using physical progressing techniques with close oversight from an assigned owner project control specialist. The team reports their progress frequently in detail, and finally, they capture their actual project results in a database that they will use for future planning.

As we said, this set of practices is common sense, but these practices are not used on many projects. IPA has found that 70 percent of small projects (i.e., < \$5 million) had poor or deficient project control practices. This is unfortunate because small projects, in relative terms,

benefit the most from project control because small projects tend to have huge percentage cost variations. As might be expected, large projects tend to use better project control practices, but still only 28 percent of large projects use good project control practices.

Please note that the practices listed do not proscribe specific estimating and control tools, detail procedures, and minutia of how the practices are done day-to-day. For example, we have found some owners who achieve good results using estimating tools developed in-house, while others are equally successful using commercial estimating software packages.

RESURRECTING THE OWNER PROJECT CONTROL FUNCTION

If your company has been “deficient” in project control practices, start now on building (or rebuilding) your in-house functional knowledge and capabilities. As discussed, most day-to-day project control activity is the responsibility of project contractors, but some tasks should not be outsourced. Your company needs in-house personnel to quantitatively validate cost estimates and bids based on cogent, up-to-date knowledge of what asset and project costs should be. In-house project control expertise is needed for establishing project control procedures and requirements for contracts. During project execution, in-house cost and project control expertise supports the project manager’s efforts to effectively spot and respond to project trends, address potential changes, negotiate

change orders, and otherwise control the project.

Building an in-house cost engineering/project control capability takes time and patience. Estimate at least three years to get up the learning curve. In year one, core people are identified and put in place, a project control process is established as part of your project system (along with plans to roll the process out and obtain buy-in from everyone in your company's project community), and basic tools acquired or built (e.g., software and databases). In year two, practices are piloted on selected projects and early learnings are fed back to improve the process, tools, and training. Benchmarking with peers in your industry and profession will help with the improvement process. In year three, some early successes should be noted that will help to overcome resistance from project teams and others. Your company is on its way to more competitive capital projects!

REFERENCES

1. Hollmann, John K. *Project History—Closing the Loop*. 1995 AACE International Transactions. Morgantown, WV: AACE International, 1995.
2. Hollmann, John K., and Edward W. Merrow. *Controlling Project Costs*. *Chemical Engineering* (November 2001).
3. Hollmann, John K., and Wesley R. Querns. *The Total Cost Management (TCM) Framework*. *Cost Engineering* (March 2001).
4. Merrow, Edward W., and M.E. Yarrosi. *Managing Capital Projects*. *Chemical Engineering* (October 1994).

Editor's note: This technical article is reprinted from the 2002 AACE International Transactions.

ABOUT THE AUTHOR

John K. Hollmann, PE CCE, is a research analyst at IPA (phone 703-810-1296, Fax: 703-709-0838, e-mail: jhollmann@ipaglobal.com). He 26 years of

engineering experience in the mining, manufacturing, process and nuclear industries, including 13 years of project control and cost engineering. At IPA, he manages the research and metrics programs of IPA's Industry Benchmarking Conference Cost Engineering Committee (CEC). He has been a technical director of **Recommended Practices** for AACE International. He is a Registered Professional Engineer (Pennsylvania) and a Certified Cost Engineer (CCE). He holds a BS in mining engineering from Pennsylvania State University and an MBA from the Indiana University of Pennsylvania. He has published a number of professional papers and was a contributing author to the **Engineer's Cost Handbook**.

Technical Articles - Each month, **Cost Engineering** journal publishes one or more peer-reviewed technical articles. These articles go through a blind peer review evaluation prior to publication. Experts in the subject area judge the technical accuracy of the articles. They advise the authors on the strengths and weaknesses of their submissions and what changes can be made to improve the article.

Get the most out of your AACE International Membership

Are you taking advantage of all the benefits your membership in AACE International International has to offer? With your membership in AACE International International, you receive the following benefits:

Professional Development

- Discounts on AACE International seminars;
- Discounts on AACE International Distance Learning courses;
- Discounts on books and other resources available through AACE International's Bookstore; and
- Discounts on AACE International's Annual Meeting.

Professional Certification

- Certified Cost Consultant (CCC);
- Certified Cost Engineer (CCE);
- Interim Cost Consultant (ICC); and
- NEW! Planning & Scheduling Specialty Certification (will be available in June 2004).

Networking

- AACE International Section meetings;
- AACE International's CyberSection; and
- AACE International's Membership Directory.

Cost Engineering Journal

- Your source for peer-reviewed technical articles, timely certification articles, and a wealth of other features, Association news, upcoming events, and much more.

Professional Leadership

- Special Interest Groups (SIG)—complimentary to all AACE International members!

- Technical Committees—complimentary to all AACE International members!

Virtual Library - Member Edition

- The Virtual Library (hosted on AACE International servers) will be accessible through any web browser, at anytime from anywhere. It will be fully searchable and will contain full-text technical articles in Adobe Acrobat (PDF) format that may be printed, downloaded, or read online.
- Complimentary to all AACE International members!

Special Program Discounts

- Life, Health, Disability, Accidental, and Dental Insurances offered at a group rate;
- MBNA America Platinum Plus MasterCard;
- Telephone Calling Card discounts—GlobalPhone Corporation;
- Hotel discounts at Choice Hotel properties—Comfort, Quality, Sleep, Clarion, Econo Lodge, Rodeway, and MainStay;
- Car rental discounts - Alamo, Avis and Hertz Rental Car; and
- Flower discounts through Extra Touch Florists.

Money Back from AACE International

- Through AACE International's Member+Plus Program, for each member you recruit, you receive "money" back from AACE International that could amount to your next year's membership being free!
- Other prizes, like a free Annual Meeting registration, are also available through the Member+Plus Program as well.

For more information on any of these services, contact AACE International Headquarters today! Phone: +1.800.585COST (2678); +1.304.2968444 or Email: info@aacei.org.